


NOTES: REF SPEC # CXWC14FM

CX-WC14FM EQUIPMENT PACKAGE:		SPEC REF
1	CX-EMF-2 Multi-Function Relay	2.2B-2A.1
2	CM-45/855SE1 - 4 1/2" ILLUMINATED PUSH PLATE WITH ENCLOSURE AND SIGN	2.2B-2A.2
3	CM-45/455SE1 - 4 1/2" ILLUMINATED PUSH PLATE WITH ENCLOSURE AND SIGN X 2	2.2B-2A.3
4	CX-MDA - MAGNETIC DOOR CONTACT X 2	2.2B-2A.5

ADDITIONAL PARTS REQUIRED BUT NOT INCLUDED WITH THE CX-WC14FM:		SPEC REF
5	DOOR OPERATOR - SUPPLIED BY OTHERS X 2	2.2B-2B.1
6	CX-ED2079 - GRADE2 UNIVERSAL ELECTRIC STRIKE X 2	2.2B-2B.2
7	CM-45/4 - 4 1/2" SQUARE ACTIVATION SWITCH X 2	2.2B-2B.3
8	CM-55CBL - FLUSH MOUNT BOX FOR CM-45/4 X 2	2.2B-2B.4
9	CX-PS13 - 12/24 VDC LINEAR POWER SUPPLY	2.2B-2B.5
10	CX-TRX-4024 - 40VA, 24 VAC TRANSFORMER	2.2B-2B.5
11	CX-PS13 - 12/24 VDC LINEAR POWER SUPPLY	2.2B-2B.5
12	CX-TRX-4024 - 40VA, 24 VAC TRANSFORMER	2.2B-2B.5

SYSTEM OPERATION

- CX-WC14FM OPERATION:
1. THE DOORS ARE NORMALLY CLOSED AND UNLOCKED.
 2. THE EXTERIOR 'PUSH TO OPEN' AURA ILLUMINATED PUSH PLATE SWITCHES OUTER RINGS ARE GREEN INDICATING THE RESTROOM IS VACANT.
 3. PRESSING EITHER 'PUSH TO OPEN' SWITCH WILL OPEN THE RESPECTIVE DOOR.
 4. ONCE THE DOOR IS CLOSED, PRESSING THE 'PUSH TO LOCK' AURA ILLUMINATED PUSH PLATE SWITCH WILL LOCK BOTH DOORS.
 5. THE 'PUSH TO LOCK' OUTER RING WILL GLOW RED INDICATING THE DOORS ARE LOCKED.
 6. THE EXTERIOR AURA™ ILLUMINATED PUSH PLATE RINGS WILL TURN RED INDICATING THE RESTROOM IS OCCUPIED.
 7. PRESSING EITHER ALL-ACTIVE PUSH PLATE SWITCH WILL OPEN THE RESPECTIVE DOOR AND RESET THE SYSTEM. AURA™ ILLUMINATED PUSH PLATE SWITCHES WILL GLOW GREEN INDICATING THE RESTROOM IS VACANT.
 8. IF THE DOOR IS OPENED MANUALLY TO EXIT THE RESTROOM, THE OVERHEAD MAGNETIC CONTACT SWITCH RESETS THE SYSTEM.

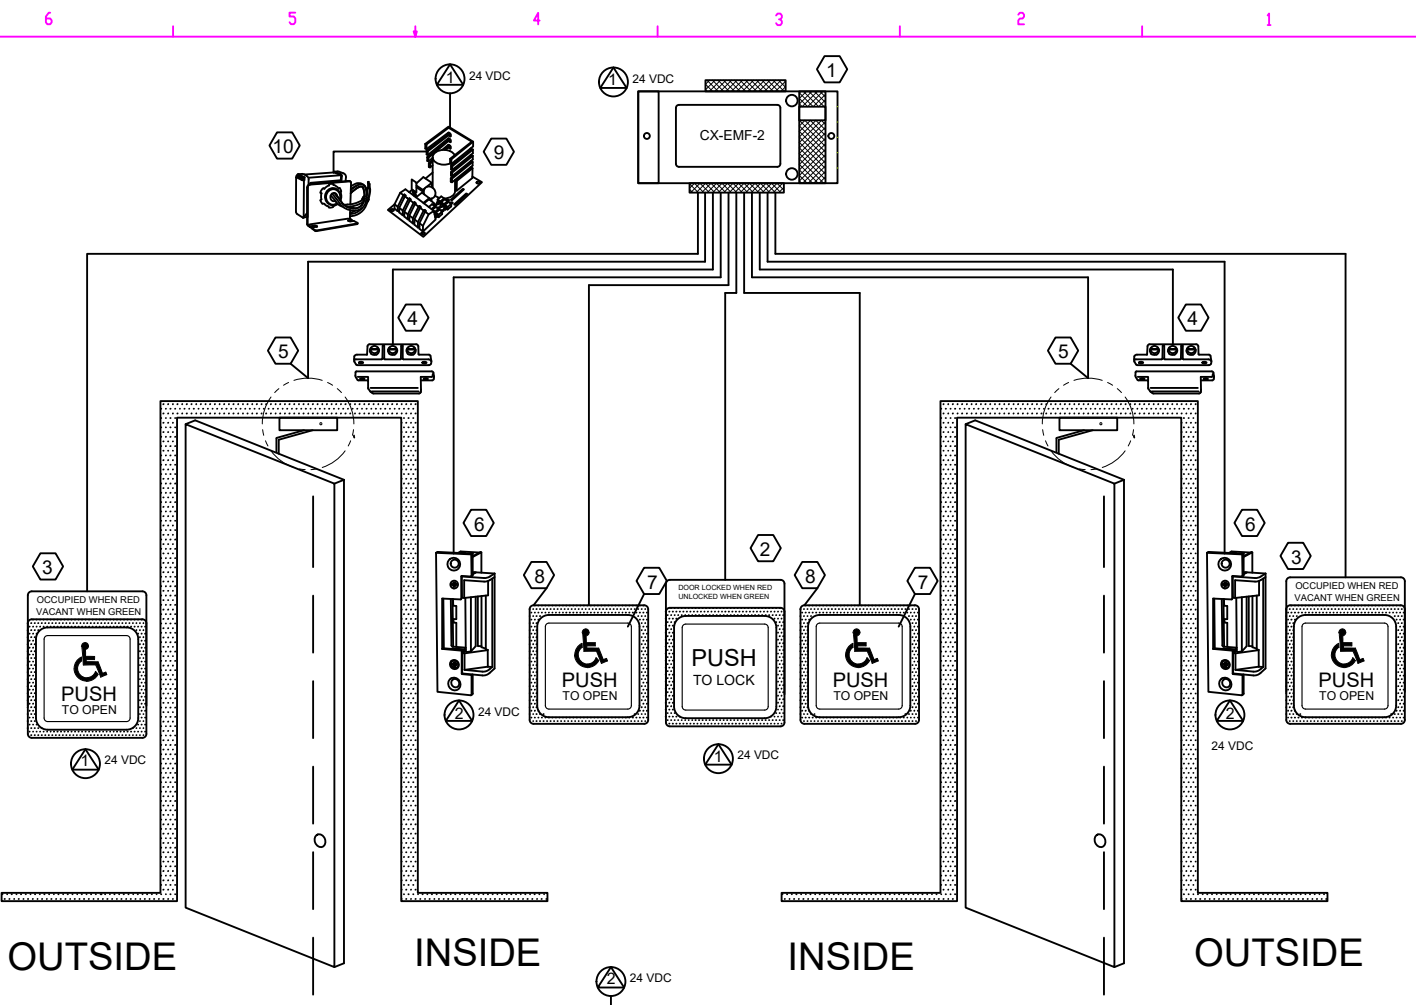

		5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 Tel: (905) 366-3377 www.camdencontrols.com	
NAME	DATE	TITLE	
J.LEWIS	MAR-17	BARRIER FREE DOOR CONTROL AND EMERGENCY NORMALLY UNSECURED (CX-WC14FM)	
DRAWN		SIZE DWG. NO.	REV
CHECKED		B	2
ENG APPR.		CX-WC14FM.DWG	
MFG APPR.		SCALE: N/A	SHEET 1 OF 1
QA			
COMMENTS:			